

To: _____

Specification Document

Flat Type Water Leakage Sensor AD-FH

Date:()

<Manufacturer >

System Equipment Division
Electronic Materials & System Equipment Group
TATSUTA Electric Wire & Cable Co., Ltd.

System Equipment Division		
Approved by:	Checked by:	Prepared by:

<<<Important safety instructions>>>

Warning

Improper handling of the sensor in non-compliance to any of the following warning precautions or instructions given on a WARNING label can result in death, serious injury, fire, electric shock, and/or sensor failure.

Warning Precautions

Strictly Prohibited !

- Never use the sensor as electric cable.

Confirm !

- The sensor length must not exceed 100 m per circuit.
- Handle the sensor carefully; it will not work if soiled or damaged.
- Take precautions to ensure the sensor does not become wet.
- Before use, be sure to read the precautions on the rear of the sensor case.

Caution on Installation !

- Do not install the sensor directly on any surface where dew can form.
- Attach the sensor as tightly as possible to the mounting surface. Any unavoidable gap such as on an uneven floor or the like horizontal surface must not exceed 2 mm, and on a pillar, beam or the like vertical surface the gap must not exceed 1 mm.
- To minimize the influence of external electromagnetic induction, the sensor comprises two electrodes twisted in a braid form. However, avoid installing the sensor over a long distance in parallel with a power cable or other electromagnetic induction sources.
- Where the sensor intersects a power cable of 300 V or higher service voltage, surround the sensor completely with an insulating protective barrier, such as plastic molding.
- Install the sensor so that it can be easily replaced. After detection of water leakage, the sensor is reset when the water has evaporated. However, if the sensor absorbs water that contains conductive or water-repellent material, it possibly cannot be reset and needs to be replaced.
- To prevent electrical corrosion of the sensor, be sure to connect it to an alternate-current water leakage detector.
- Do not allow wax or other oil-based material on the sensor; water is repelled from the surface and may not be detected.

Table of contents

	Page
1. Scope	1
2. Construction	1
3. Specifications	2

1. Scope of application

The specification document is applicable for the flat type water leakage sensor (AD-FH). It can be used to quickly detect the water leakage.

2. Construction

Fig. 1 and Fig. 2 show the construction of the AD-FH sensor.

Electrode: 0.33 mm^2 tinned annealed copper wire

Inner sheathing: Vinyon

Outer sheathing: Polypropylene

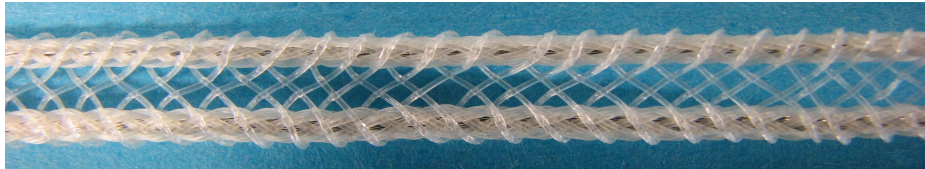


Figure 1: Schematic Diagram of AD -FH Sensor

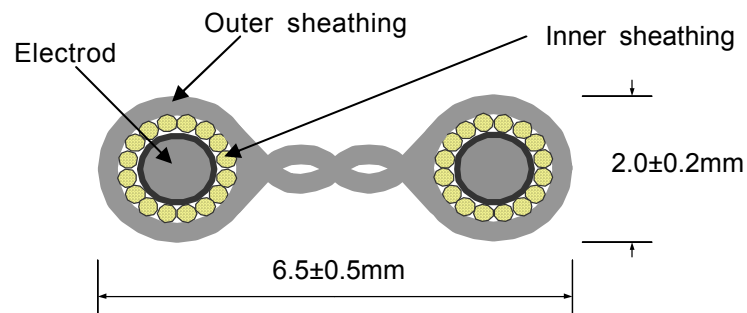


Fig. 2: Cross-section Diagram of the AD-FH Sensor

3. Specifications

The specifications of AD-FH sensor are shown in Table 1.

Table 1

Item	Specification																							
Construction	Material: Tinned annealed copper stranded wire Composition: Copper wire 0.18mm in diameter × 13 (0.33 mm ²)																							
Detection characteristic	<p>Relation of the moistening length (electrode immersion) of Detector manufactured by the Company with the detection water capacity Measuring ambient temperature: 24□, humidity: 60%RH</p> <table border="1"> <thead> <tr> <th>Conductivity water temperature: 24°C, 200μS/cm [5.0kΩ·cm] Water leakage detection Level setting</th> <th>Break detection terminal (20kΩ)</th> <th>During water leakage detection, the resistance between the sensor electrodes</th> <th>Moistening length of the sensor (electrode immersion)</th> <th>Detection water capacity □ Reference</th> </tr> </thead> <tbody> <tr> <td rowspan="2">5kΩ</td> <td>Connection · without</td> <td>5.0kΩ</td> <td>70~120mm</td> <td>12~23ml</td> </tr> <tr> <td>Connection · with</td> <td>6.7kΩ</td> <td>60~100mm</td> <td>7~17ml</td> </tr> <tr> <td rowspan="2">8.0kΩ (Recommended)</td> <td>Connection · without</td> <td>8.0kΩ</td> <td>50~80 mm</td> <td>4~14ml</td> </tr> <tr> <td>Connection · with</td> <td>13.3kΩ</td> <td>30~60 mm</td> <td>2~5 ml</td> </tr> </tbody> </table> <p>Testing equipment: Water leakage detector AD-AS-10DRM manufactured by our company. □ The relationship between wet length (electrode immersion) of the induction sensor and the detection water capacity corresponded to wet length will change according to laying surface status, environment and water quality for the sensor.</p>	Conductivity water temperature: 24°C, 200μS/cm [5.0kΩ·cm] Water leakage detection Level setting	Break detection terminal (20kΩ)	During water leakage detection, the resistance between the sensor electrodes	Moistening length of the sensor (electrode immersion)	Detection water capacity □ Reference	5kΩ	Connection · without	5.0kΩ	70~120mm	12~23ml	Connection · with	6.7kΩ	60~100mm	7~17ml	8.0kΩ (Recommended)	Connection · without	8.0kΩ	50~80 mm	4~14ml	Connection · with	13.3kΩ	30~60 mm	2~5 ml
Conductivity water temperature: 24°C, 200μS/cm [5.0kΩ·cm] Water leakage detection Level setting	Break detection terminal (20kΩ)	During water leakage detection, the resistance between the sensor electrodes	Moistening length of the sensor (electrode immersion)	Detection water capacity □ Reference																				
5kΩ	Connection · without	5.0kΩ	70~120mm	12~23ml																				
	Connection · with	6.7kΩ	60~100mm	7~17ml																				
8.0kΩ (Recommended)	Connection · without	8.0kΩ	50~80 mm	4~14ml																				
	Connection · with	13.3kΩ	30~60 mm	2~5 ml																				
Resetting characteristic	After the water leakage detection, the sensor is reset by natural drying or moisture removal. However, if there are conductive or water-repellent substances in the leaking water, the sensor should be cleaned. According to the state after cleaning, it can be used again.																							
Resistance between electrodes (AC)	20 MΩ min. /100m (measuring ambient temperature: 24°C, humidity: 60%RH)																							
Humidity resistance	In the high humidity condition, the resistance between electrodes is 100kΩ or above /100m (measuring ambient temperature: 60°C, humidity: 95%RH) provided that there is no moisture condensation.																							
Heat resistance	60°C max. for continuous operation (heat-resistant temperature: 80□)																							
Weight	8.5±1.0 g/m																							