


# Manual Variable Attenuator

## SPEC SHEET

### Key Features


- Mini Type Manual variable Attenuator (MVOA) operates by manually moving a shading element into optical beam.
- The shading element can be integrating adjusted to get any attenuation value in a range.
- MVOA features low insertion loss, good resolution, high stability.

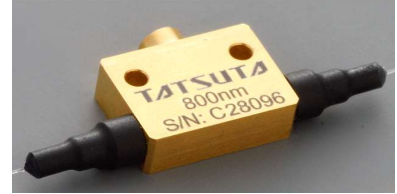

### Specifications

Parameter	Unit	Value		
Center Wavelength	nm	840	1050	1310
Wavelength Range	nm		±50	
Max. Excess Loss	dB	1.5	0.6	0.6
Min. Return Loss	dB		50	
Min. Attenuation Range	dB		60	
Max. Optical Power (Continuous Wave)	mW		300	
Fiber Type	-	HI 780C	HI 1060	SMF28e+
Operating Temperature	°C		0 to 70	
Storage Temperature	°C		-40 to +85	

### Package Dimensions

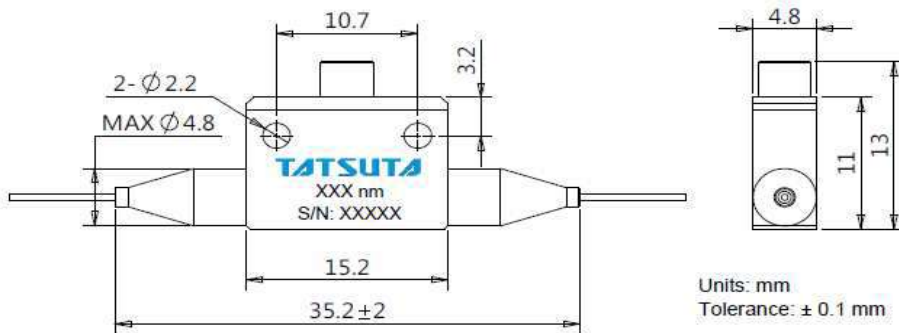

### Order Sheet